

AVERAGING AXIAL AND BIAXIAL

Clip-On Extensometers

Measure averaging axial and transverse strain on polymer matrix composites, metals, and plastics.

Extend your testing range with the ability to attach to various specimen types using interchangeable contact options.

Single-handed operation ensures consistent results and facilitates safe use within a temperature chamber.

High-strength aluminum, titanium, and stainless steel construction provides reliable operation under demanding conditions, such as testing inside a temperature chamber.

Meets calibration requirements of ASTM E83 class B1, ISO 9513 class 0.5, and ISO 527.

Unique electronic serial number ensures correct calibrations when using extensometer on multiple machines.



PRINCIPLE OF OPERATION


These Bi-axial and Averaging Axial clip-on extensometers use strain gauges for measurement and are constructed from high-strength aluminium, titanium, and stainless steel. All of the extensometers feature simple, single-handed operation. The extensometer incorporates automatic electrical calibration and transducer recognition including a unique digital serial number.

All of the extensometers measure the axial strain on both sides of the specimen. Versions are available that provide either a single averaged axial strain output or two independent axial strain outputs. In all cases, the use of average axial strain corrects for any specimen bending due to mis-alignment for the consistent and accurate determination of modulus. The independent output versions allow simultaneous monitoring of both; the average axial and the bending strain. Additionally, the biaxial versions measure transverse strain that allows for the determination of Poisson's Ratio and the in-plane shear modulus.

Conical points are provided as standard with the extensometer and are recommended for most composite materials. A range of contact options are available: line contacts, which are recommended for use with soft materials, such as thermoplastics; and vee profiles, which are most suitable for thin section test pieces.

SPECIFICATIONS - AVERAGING AXIAL EXTENSOMETERS

		2650-560 ¹	2650-564 ¹
Axial Gauge Length	mm	25	—
	in	—	1
Axial Travel	mm	-0.5 to +1.25	—
	in	—	-0.02 to +0.05
Axial Strain	%	-2 to +5	-2 to +5
Specimen Thickness	mm	0 to 34	0 to 34
	in	0 to 1.34	0 to 1.34
Specimen Width	mm	0.1 to 55	0.1 to 55
	in	0.004 to 2.17	0.004 to 2.17
Weight	gm	130	130
	oz	4.6	4.6
Dimension (L × W × H)	mm	110 × 120 × 40	110 × 120 × 40
	in	4.3 × 4.7 × 1.6	4.3 × 4.7 × 1.6
Temperature Range	°C	-200 to 200	-200 to 200
	°F	-328 to +392	-328 to +392

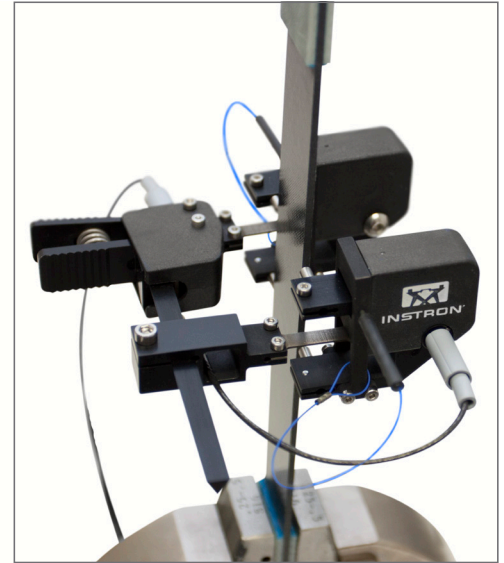

Classifications

	2650-560 ¹	2650-564 ¹
ASTM E 83	B1	B1
ISO 9513	0.5	0.5
ISO 527-1 (in annex C)	Yes	Yes

SPECIFICATIONS – BIAxIAL EXTENSOMETERS

		2650-561 ¹ 2650-571 ²	2650-563 ¹ 2650-573 ²	2650-565 ¹	2650-567 ¹
Axial Gauge Length	mm	25	50	—	—
	in	—	—	1	2
Axial Travel	mm	-0.5 to +1.25	-0.5 to +1.25	—	—
	in	—	—	-0.02 to +0.05	-0.02 to +0.05
Axial Strain	%	-2 to +5	-1 to +2.5	-2 to +5	-1 to +2.5
Transverse Travel	mm	±0.5	±0.5	—	—
	in	—	—	±0.02	±0.02
Max. Crosstalk ³	% of FS	0.5	0.5	0.5	0.5

Transverse Classifications⁴

	2650-561 ¹ 2650-571 ²	2650-563 ¹ 2650-573 ²	2650-565 ¹	2650-567 ¹
ASTM E 83	B1	B1	B1	B1
ISO 9513	0.5	0.5	0.5	0.5

Notes (All specifications as averaging axial extensometers above + additional specifications below):

1. Single average axial output
2. 2x Independent axial outputs
3. Maximum change in transverse output (% of full scale) due to a full scale axial strain
4. Over specimen widths between 10 - 32 mm (0.4 to 1.26 in)

www.instron.com



Worldwide Headquarters
825 University Ave, Norwood, MA 02062-2643, USA
Tel: +1 800 564 8378 or +1 781 575 5000

European Headquarters
Coronation Road, High Wycombe, Bucks HP12 3SY, UK
Tel: +44 1494 464646